







M7262

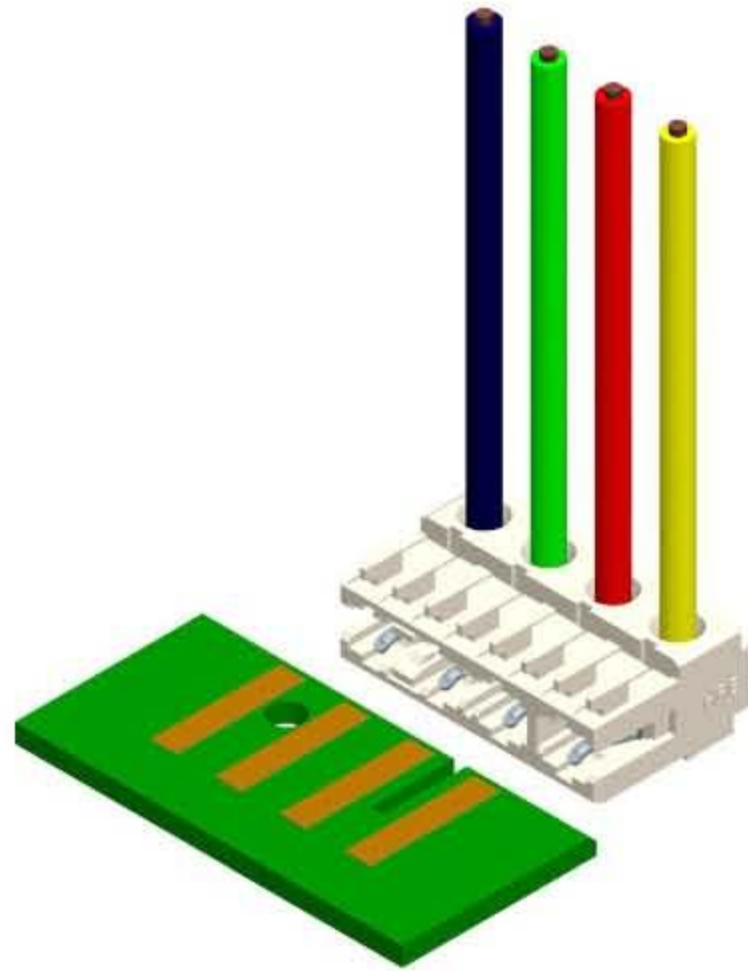

SPECIFICATION

Current rating: 6AAC, DC
 Voltage rating: 250V AC, DC
 Operating Temperature: -40°C--+120°C
 Contact Resistance: 10mΩ max.
 Insulation resistance: 1000MΩ min.
 Withstanding voltage: 2800V AC/minute
 Material: Housing: Nylon66 UL94V-0
 Terminal: Phosphor bronze, Tin-plated
 Wire range: AWG 20 to 18
 GWT:750°C IEC-60335-1

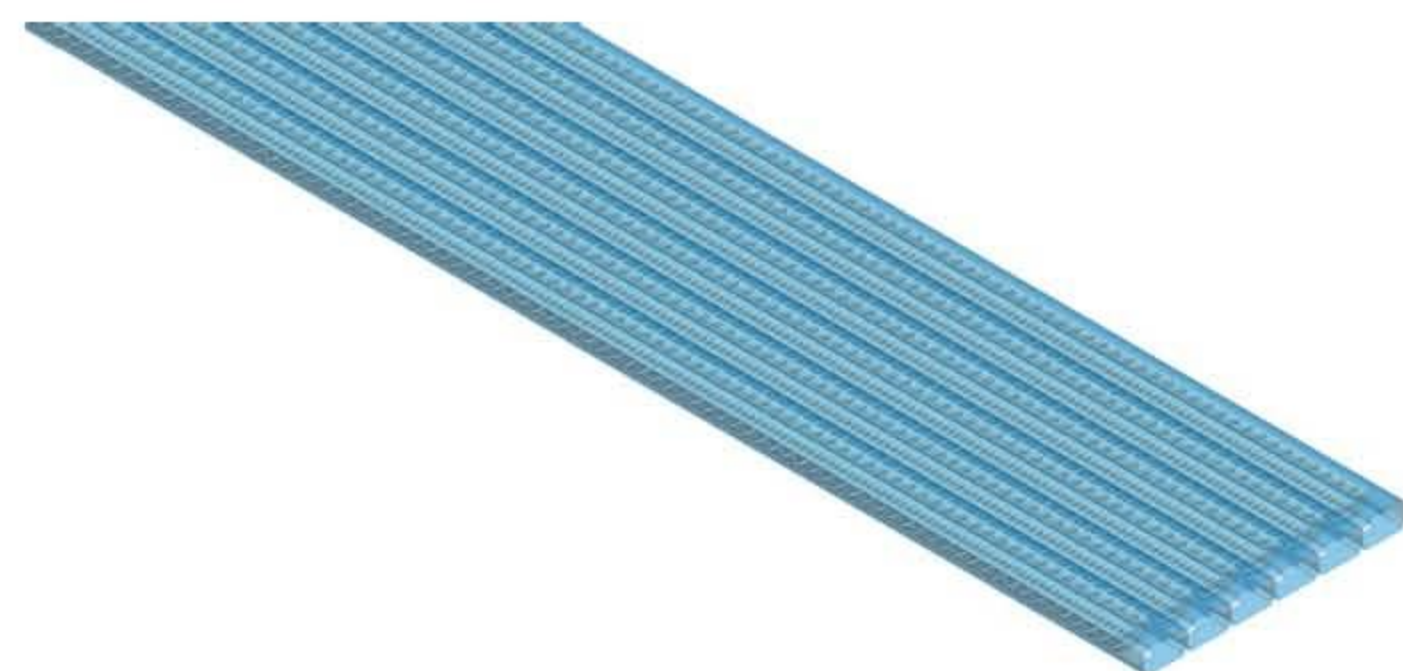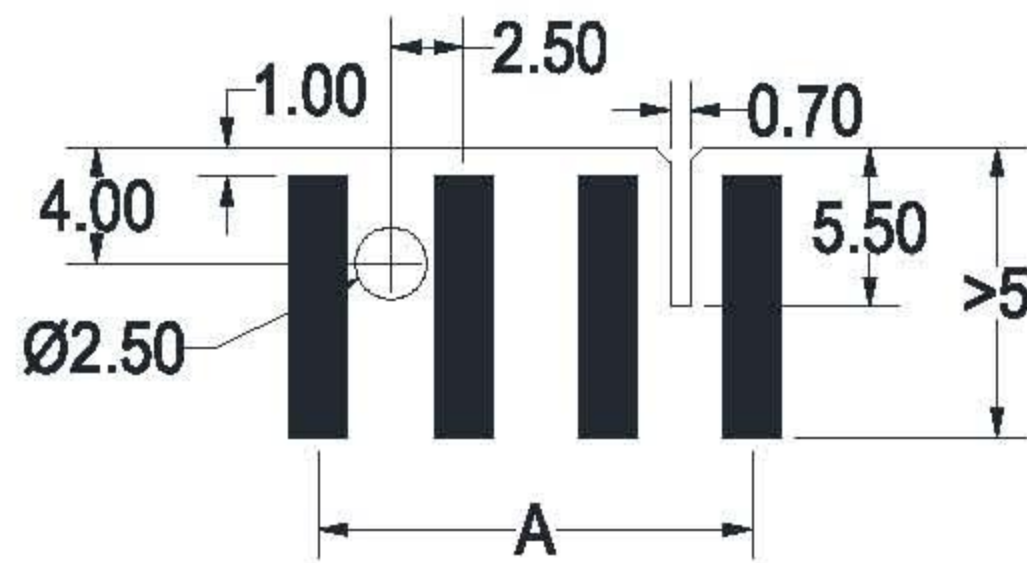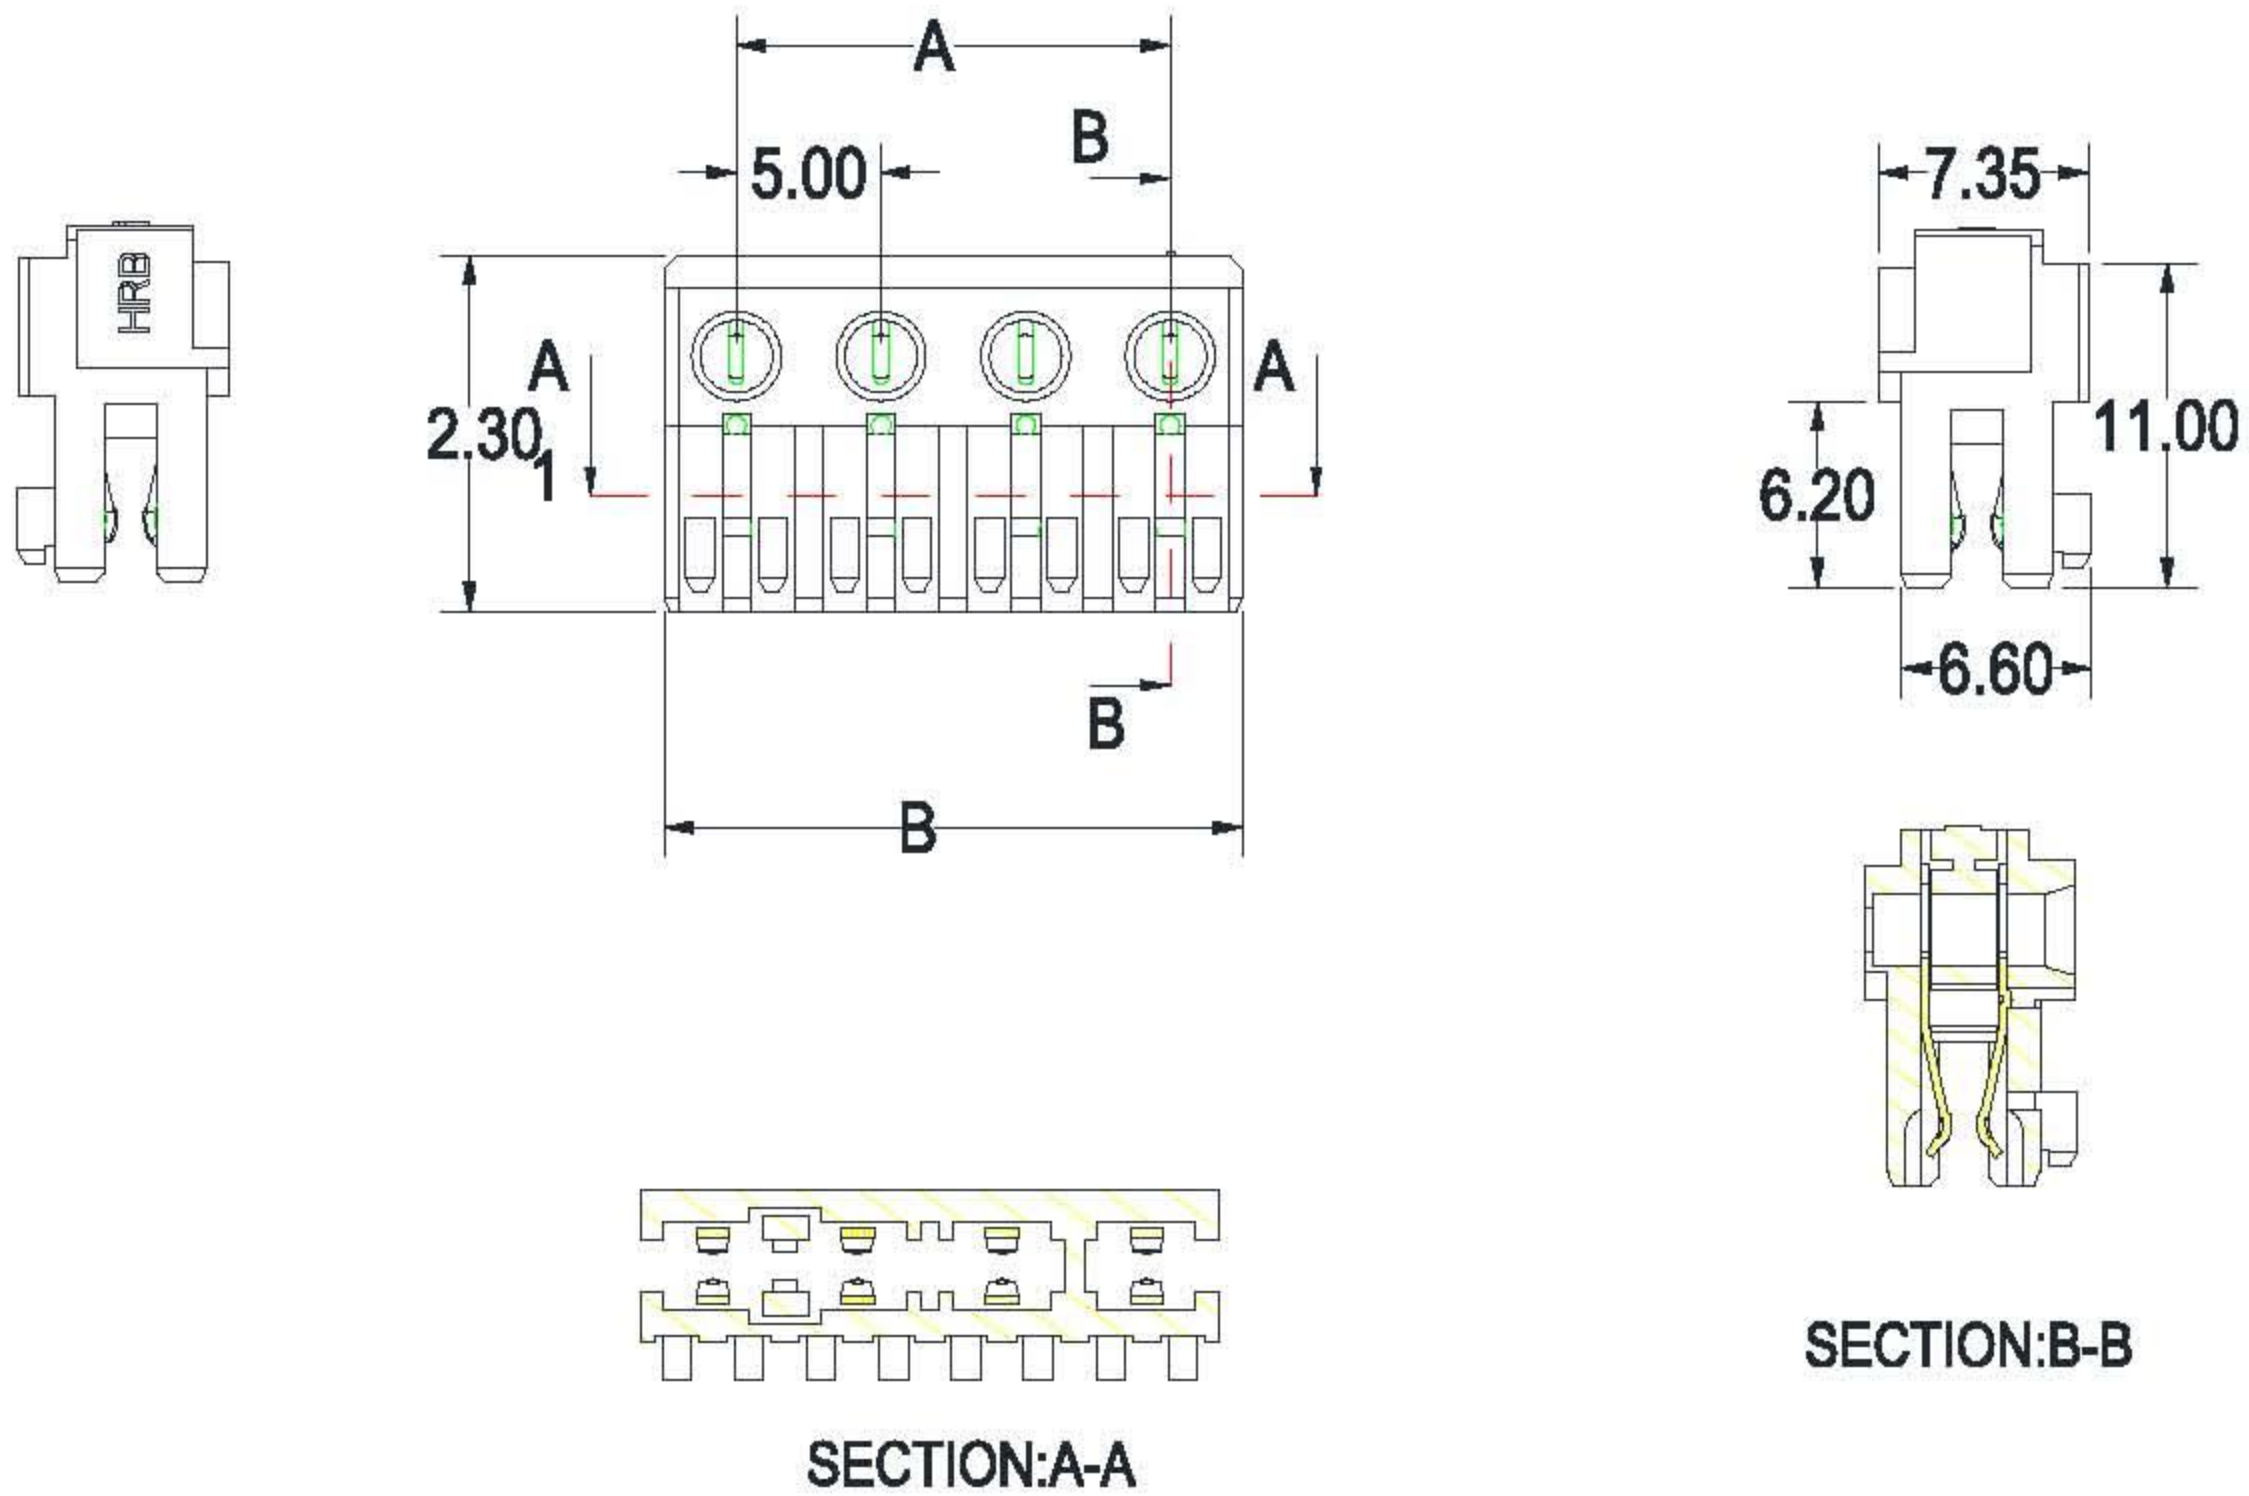

Dimension		
Pos.No.	A	B
2	5	10
3	10	15
4	15	20
5	20	25
6	25	30
7	30	35
8	35	40
9	40	45
10	45	50



M7262 Part Number Definition

M7262 R-X-X-X-X(X)

- Wire size number:
8:AWG#18
2:AWG#20
- Contact plated number:
Blank: Tin plated
00H: Selective gold plated 1u"
02H: Selective gold plated 3u"
03H: Selective gold plated 5u"
- Solid rib position:
0: Without solid rib
1: With solid rib between pole 1 and pole 2
2: With solid rib between pole 2 and pole 3
and so on
- Hook position:
1: With hook between pole 1 and pole 2
2: With hook between pole 2 and pole 3
and so on
- Circuit number (2-10)
- R: 90° (to assemble at the end of wire)
Blank: 180° (To assemble in the middle of wire)
- HRB Product Series Number

